



ESD Protection Diode in SOD-323

Features

- 300Watts peak pulse power ($T_p = 8/20\mu s$)
- SOD-323 package
- Bidirectional configurations
- Low clamping voltage
- Low leakage current
- Medium capacitance ($C_j = 13pF$ typ.)
- Protection one data/power line to:
 - ISO 10605 $\pm 15kV$ contact $\pm 25kV$ air
 - IEC 61000-4-4 (EFT) 40A (5/50ns)
 - IEC 61000-4-5 (Lightning) 5A (8/20 μs)
- AEC-Q101 Qualified



Mechanical Data

- **Case:** SOD-323 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Computers and peripherals
- Communication systems
- Notebook
- Cellular handsets and accessories
- Portable electronics
- Audio and video equipment

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_P = 8/20\mu s$)	P_{PP}	300	W
ESD contact/air discharge (ISO 10605)	V_{ESD}	15/25	kV
Peak Pulse Current ($T_P = 8/20\mu s$)	I_{PP}	5	A
Junction Temperature	T_J	-55 to +150	°C
Storage temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics


($T_A = 25$ °C unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				36	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	40			V
Reverse Leakage Current	I_R	$V_R = 36V$			1	μA
Clamping Voltage (IEC 61000-4-5)	V_C	$I_{PP} = 5A$		60		V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz$		13		pF


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

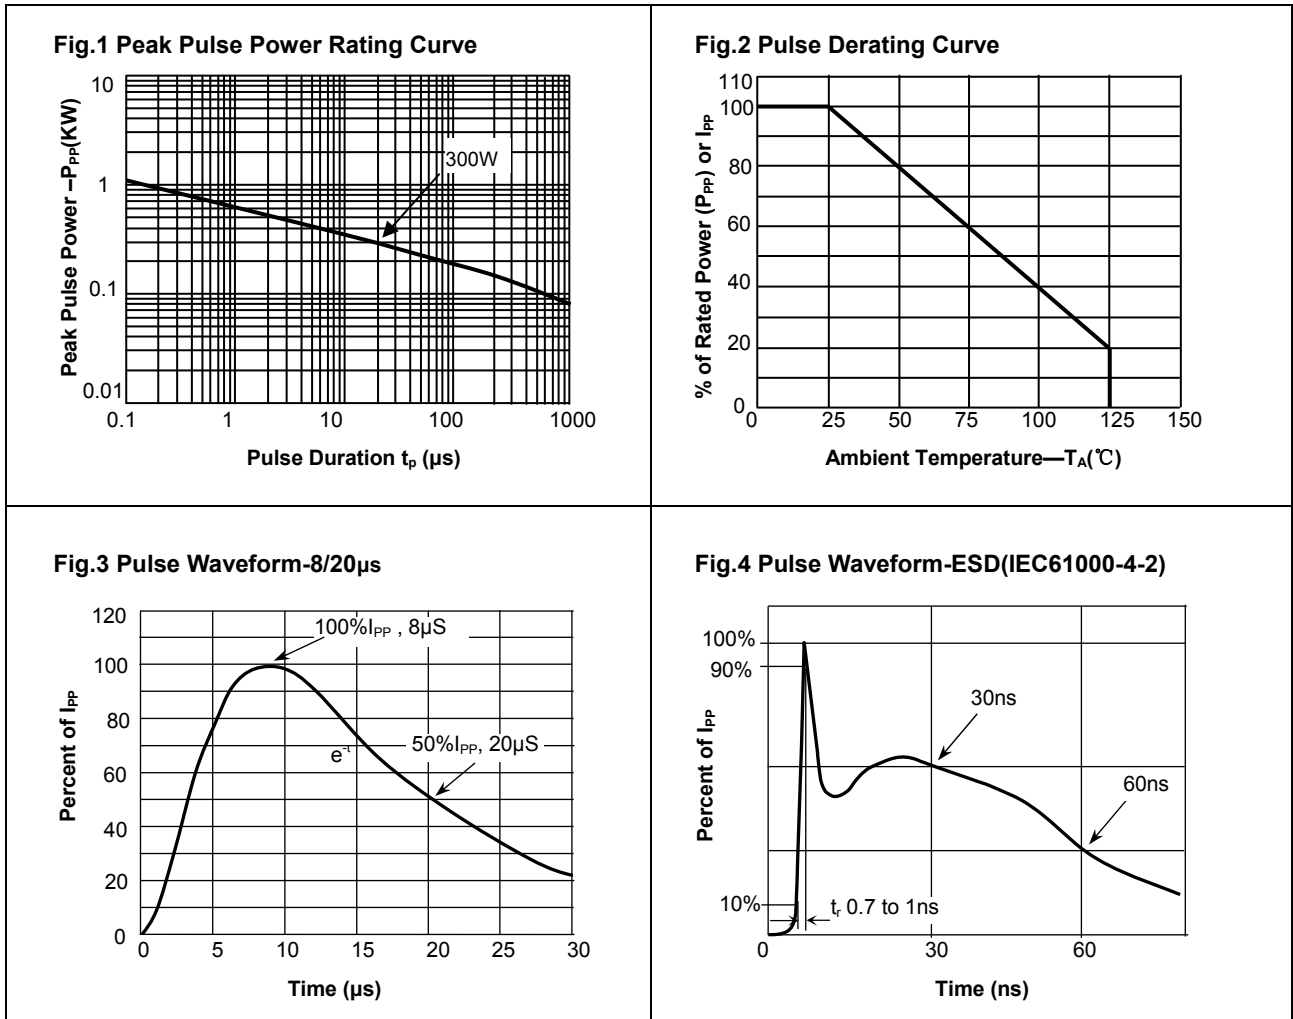


Package Dimensions

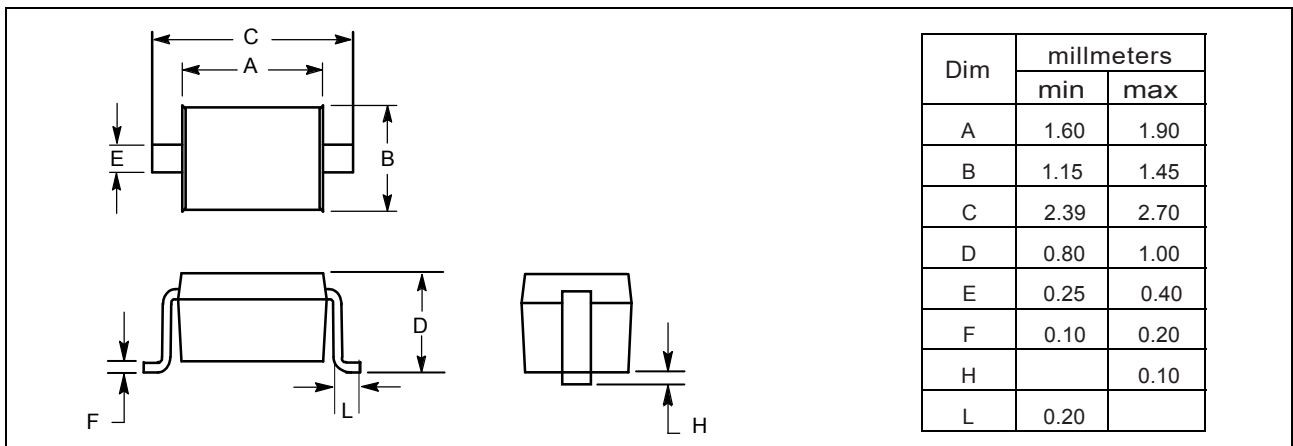

PAD Dimension

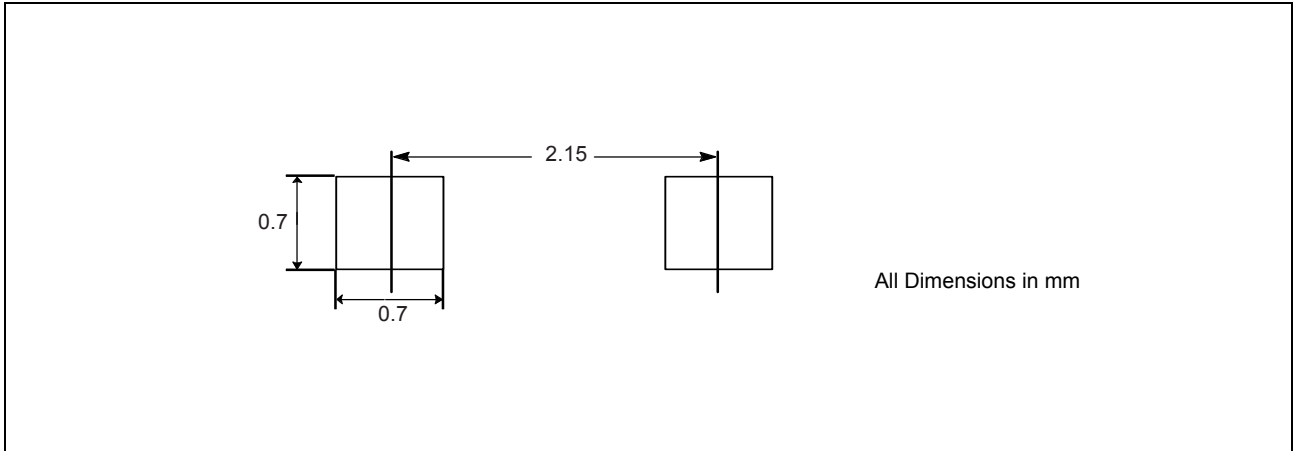

Package Information

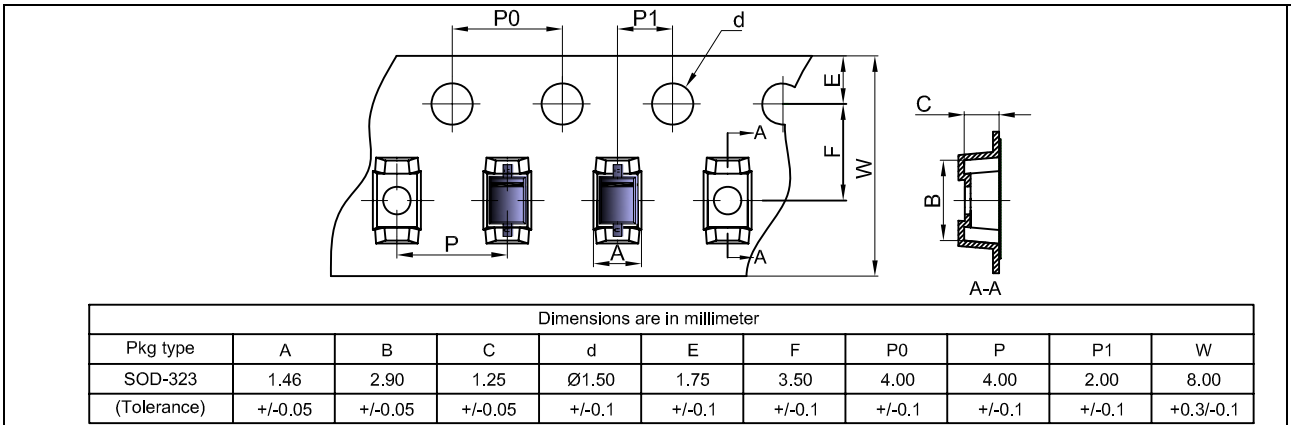

Marking



Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
J06A323NC36VB	SOD-323	Tape and reel	3000pcs / reel	EIA STD RS-481

Revision history

Date	Revision	Changes
5-Mar.-2023	3.0	Update

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, JML does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and JML assumes no liability whatsoever relating to the choice, selection or use of the JML products and services described herein.

JML reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an JML product can reasonably be expected to result in personal injury, death or severe property or environmental damage. JML accepts no liability for inclusion and/or use of JML products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of JML products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by JML for the JML product or service described herein and shall not create or extend in any manner whatsoever, any liability of JML.

JML expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. JML only obligations are those in the JML Standard Terms and Conditions of Sale and in no case will JML be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.



Specifications are subject to change without notice

© Copyright 2009, JML Electronics

® is a registered trademark of JML Electronics

All rights reserved